


Base plan view

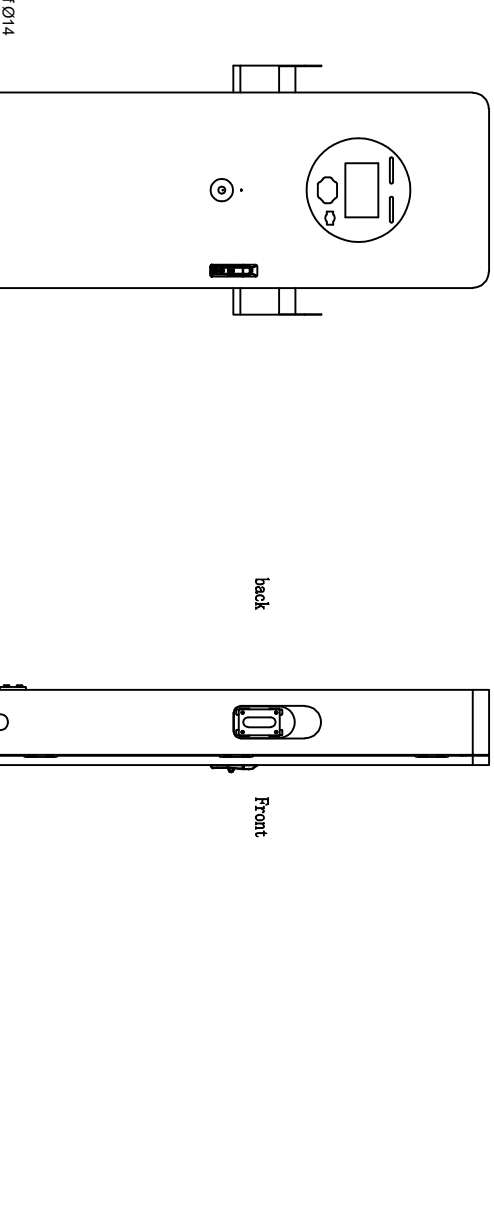

When pouring concrete, it must comply with the national standard "Code for Construction and Acceptance of Structural Engineering".

During excavation, slope protection or use of retaining boards for support should be carried out according to the type of soil. After the well pit is excavated to a sufficient depth, the soil layer at the bottom of the pit should be compacted and leveled before pouring the concrete cushion layer. Backfilling should use stone powder. Each layer of backfill should be 200mm thick and compacted layer by layer. The number of compactations should be determined based on the soil's compaction coefficient and the equipment used.

Apply a 15mm thick 1:2 cement mortar on the inner side of the well wall.

线性尺寸	尺寸公差 (GB 180)		浙江奔一新能源科技有限公司 ZHEJIANG BENYI NEW ENERGY CO.,LTD.	单 位	mm	图号		
	+	-						
>0~30	0.2	0.2		比 例	1: 1	BODC混凝土地基 混凝土		
>30~120	0.3	0.3		表面处理	/			
>120~400	0.5	0.5		颜 色	/			
>400~1000	0.8	0.8		数 量	/			
>1000~2000	1.2	1.2	V1.0	首 发	2025. 1. 7	批准		
>2000~4000	2	2	版本	说 明	日期		签名	共1页